




Kit 1688


ISUZU D-Max, 4-dr Crew Cab, 12–



754 Rapid System
480R Rapid Traverse (North America)




480 Traverse (North America)




THULE[®]
SWEDEN


ISO 11154-E




Max. 75 kg
Max. 165 lbs
















































(North America)

























1

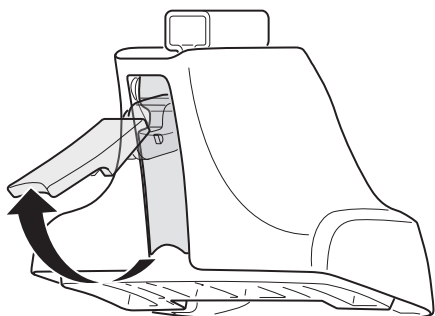



2




754 Rapid System
480R Rapid Traverse
(North America)



x4





x4

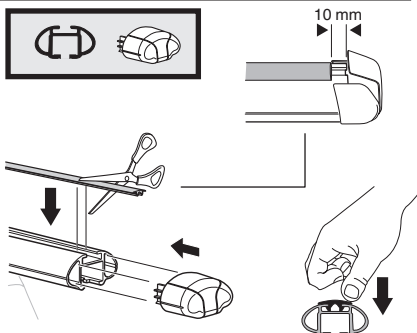

x4




480 Traverse
(North America)




x4

3




754 Rapid System



X

ISUZU D-Max, 4-dr Crew Cab, 12-

38



Y

ISUZU D-Max, 4-dr Crew Cab, 12-

35,5

3



480R Rapid Traverse




480 Traverse



(North America)



X inch/mm



X inch

X mm


ISUZU D-Max, 4-dr Crew Cab, 12-

40 ⁵/₈ "

1031 mm



Y inch/mm



Y inch


Y mm

ISUZU D-Max, 4-dr Crew Cab, 12-

39 ⁵/₈ "



1006 mm

4




5


ISUZU D-Max, 4-dr Crew Cab, 12-

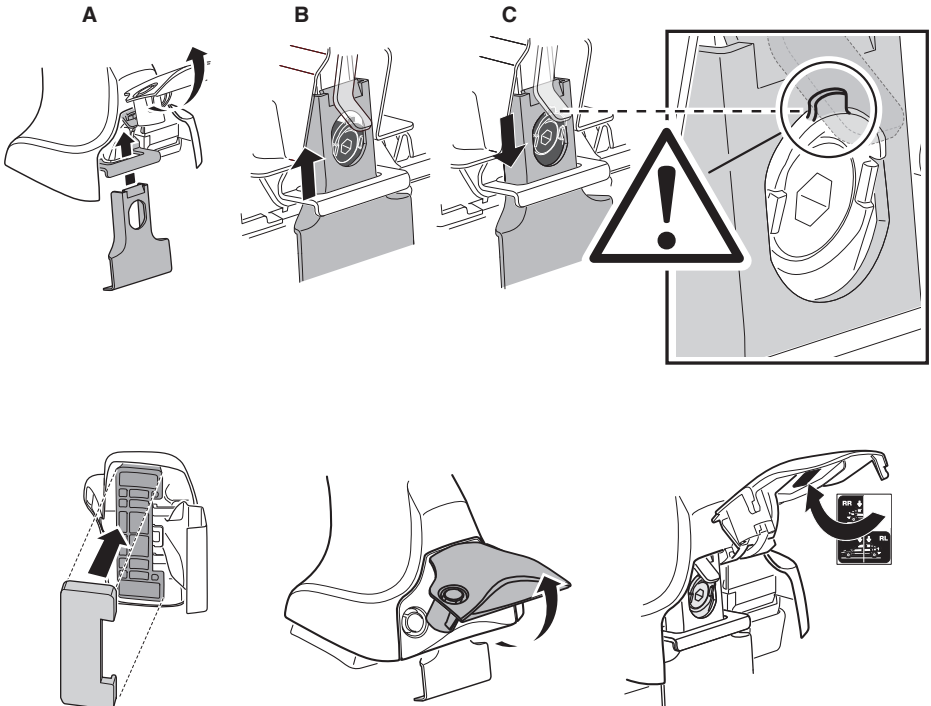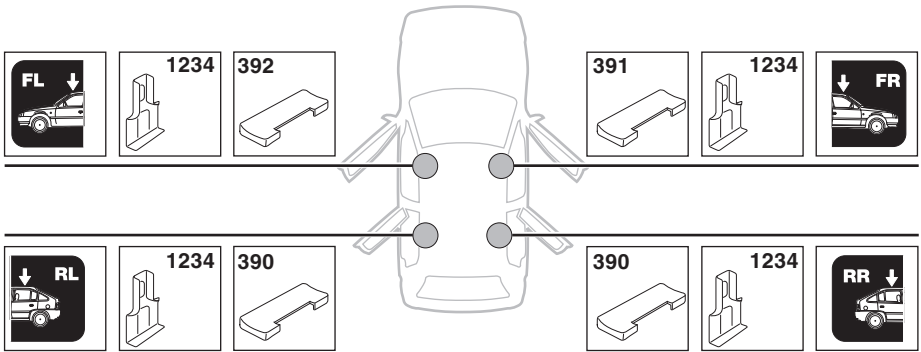


6

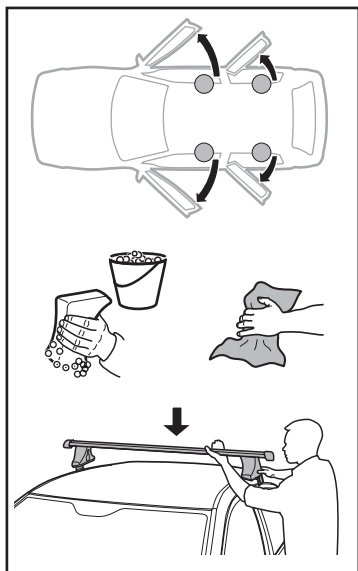



i

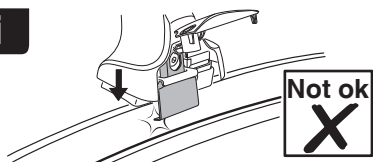



A




B

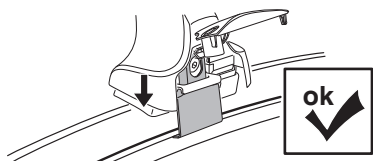

	X mm	Y mm	X inch	Y inch
ISUZU D-Max, 4-dr Crew Cab, 12-	250 mm	700 mm	9 7/8"	27 1/2"

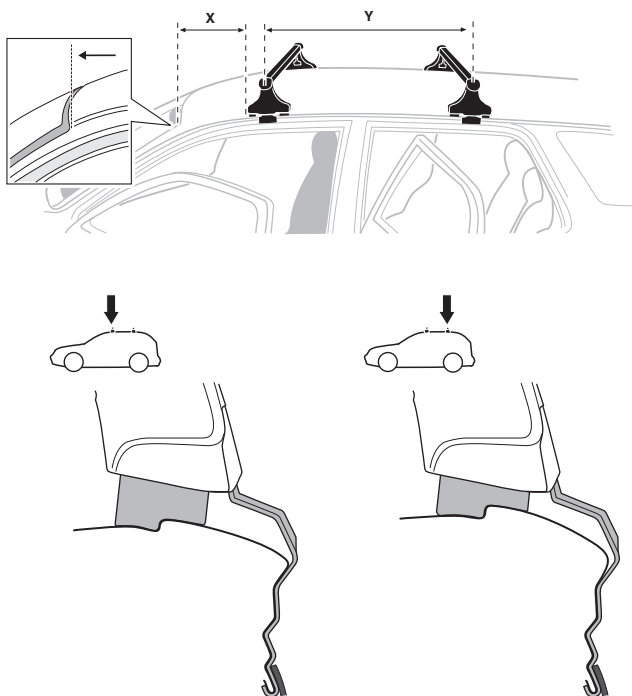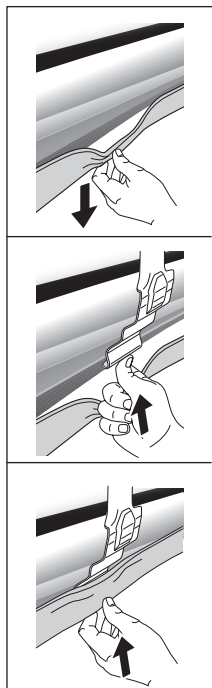

7



GB/US Tighten alternately
D Die Schrauben abwechselnd anziehen
F Serrer alternativement chaque côté
NL Afwisselend aan de linker- en de rechterkant aandraaien
I Alternare il serraggio delle viti
E Apretar alternativamente
PT Aperte alternadamente
S Dra åt växelvis
FIN Kierrä vuorotellen
EST Pinguldage vaheldumisi
LAT Pieļieciet pamišus
LIT Užsukinėkite pakaitomis
PL Śruby dokręcaj naprzemiennie
RU Затягивайте попеременно





CZ Pokręťta багаžníka dokręcaj dokręcaj naprzemiennie.
SK Dofahujte striedavo
SLO Privijajte izmenično.
HR Naizmjenočno zategnite
HU Egymástól fűggetlenül szorítandó
GR Σφιγγετε εναλλάξ
TR Dönüşümlü sıkın

中文 交替拧紧



한국어 번갈아 가며 조이십시오.

日本語 交互に締め付けてください。

ไทย ชันในแบบสลับ

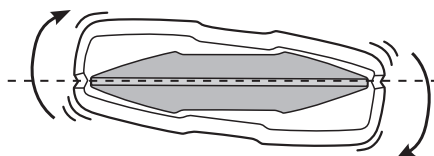


≈ 3 Nm

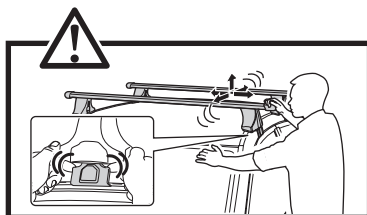



8



x1
17 mm



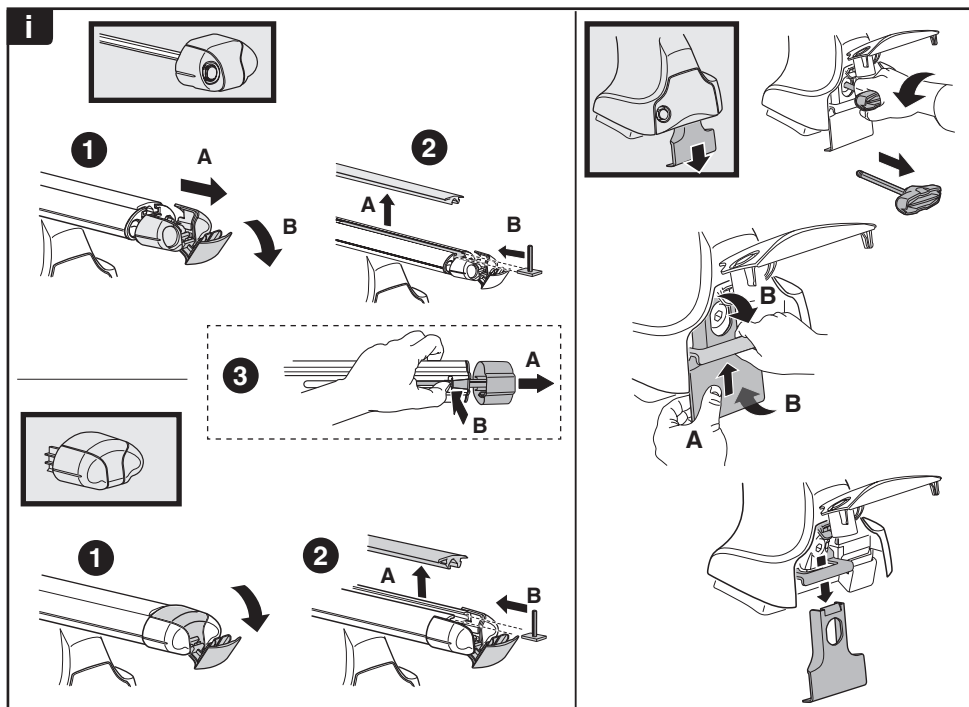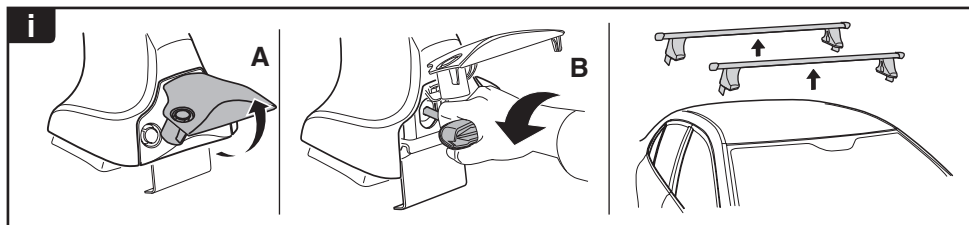

THULE®
SWEDEN

**ONE
KEY
SYSTEM**

544 (x4)

596 (x6)

588 (x8)

NA **510** (x10)

EUR **452** (x12)

ASIA